


Roof Walkway Matting Advanced

External safety walkway system with four-way drainage



Watco Roof Walkway Matting Advanced takes roof safety to the next level. Taking all the best features of our original Roof Walkway Matting, with an added four-way drainage system, a redesigned top bar with a deeper cut for enhanced slip resistance and to give you peace of mind, a ten-year warranty. Even in the storm conditions, Roof Walkway Matting will provide superior performance, protecting the roof structure from damage, while the cross directional top ribs ensure safety underfoot.

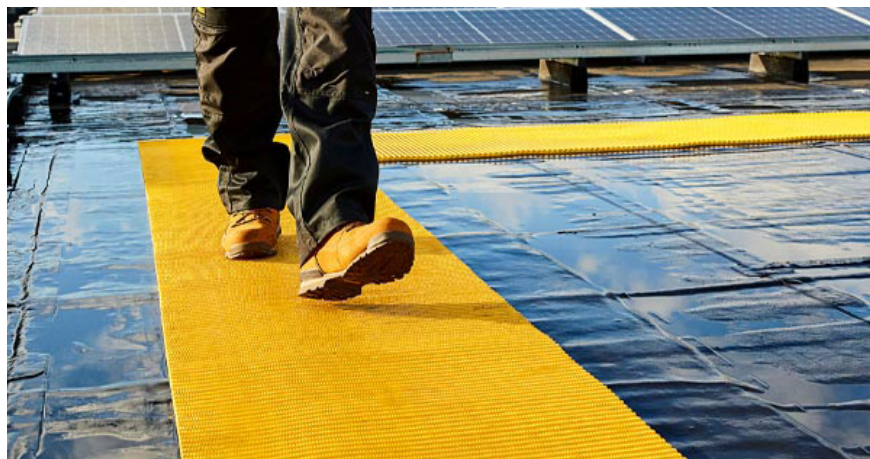

Colours



Light Grey



White



Yellow

Samples are available on request.

While great care is taken with the colour samples shown, no guarantee can be given that they represent exactly the colours offered.

Areas of use:

- All flat or gently sloping roofs where regular access is required

Features:

- Deeper cut pattern
- Two-layer construction for added strength and durability
- Flexible, one-piece construction
- Quick and easy to apply – loose lay, no fixings required
- Self draining open grid design
- Weight holds matting in place
- Certified slip resistance (DIN 51130: R11; ASTM E303 Dry/Wet with lines along–lines across 78-90 / 63-71)
- Excellent four-way drainage (DIN 51130: V10)
- Contours to roof structure and protects the membrane
- Stands strong in winds up to 125mph
- Resistant to most acids, alkalines and oils.
- Available in rolls:
10m x 14mm thick and 600mm / 910mm / 1220mm wide

Need help? Speak to the experts

Our dedicated and professional team are here to help you get the best results for your project.

They will talk you through the preparation and application stages when using **Roof Walkway Matting Advanced**.

Call our expert team on: **01483 418 418** (Weekdays 8:00am - 5:30pm. Saturday 9:00am - 12:00pm)



Roof Walkway Matting Advanced

External safety walkway system with four-way drainage

Specification

Acoustic	Excellent sound absorption.
Availability	Available in rolls 14mm thick: 10m x 600mm - 10m x 910mm - 10m x 1220mm.
Chemical Resistance	Resistant to most acids, alkalines and oils. For more information, please contact our expert advisors.
Cleaning	Simply lift or roll to clean. Easy to clean with a high-pressure hose.
Composition	Flexible Polyvinyl Chloride (PVC).
Drainage	DIN 51130:v10
Environment	Watco Roof Walkway Matting Advanced is 100% recyclable.
Fire Resistance	EN ISO 13501 - 1 : 2007 - CFL - S1
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Primer Required	No.
Properties	Two-layer construction and channelled underbars. Deep cut pattern in a flexible PVC.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in a hot environment.
Slip Resistance	DIN 51130:R11 ASTM E303 Dry/Wet with lines along-lines across 78 - 90 / 63 - 71
Suitable for	Flat or gently sloping roofs.
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV Light	Resistant to PVC degradation.
Weight	5.8kg/m ² (1.2 lb/sq.ft)
Warranty	Ten years. The product will remain functional and will not degrade in such a manner as to cause leaks in the PVC roof membrane.
Wind Resistance	Roof Walkway Matting Advanced remains stable in winds up to 60mph (96km/h). Tests in Florida have previously shown when laid flat on a stable platform Roof Walkway Matting Advanced remained in position for wind speeds of 125mph (200km/h).