


Speed Bumps Installation Guide

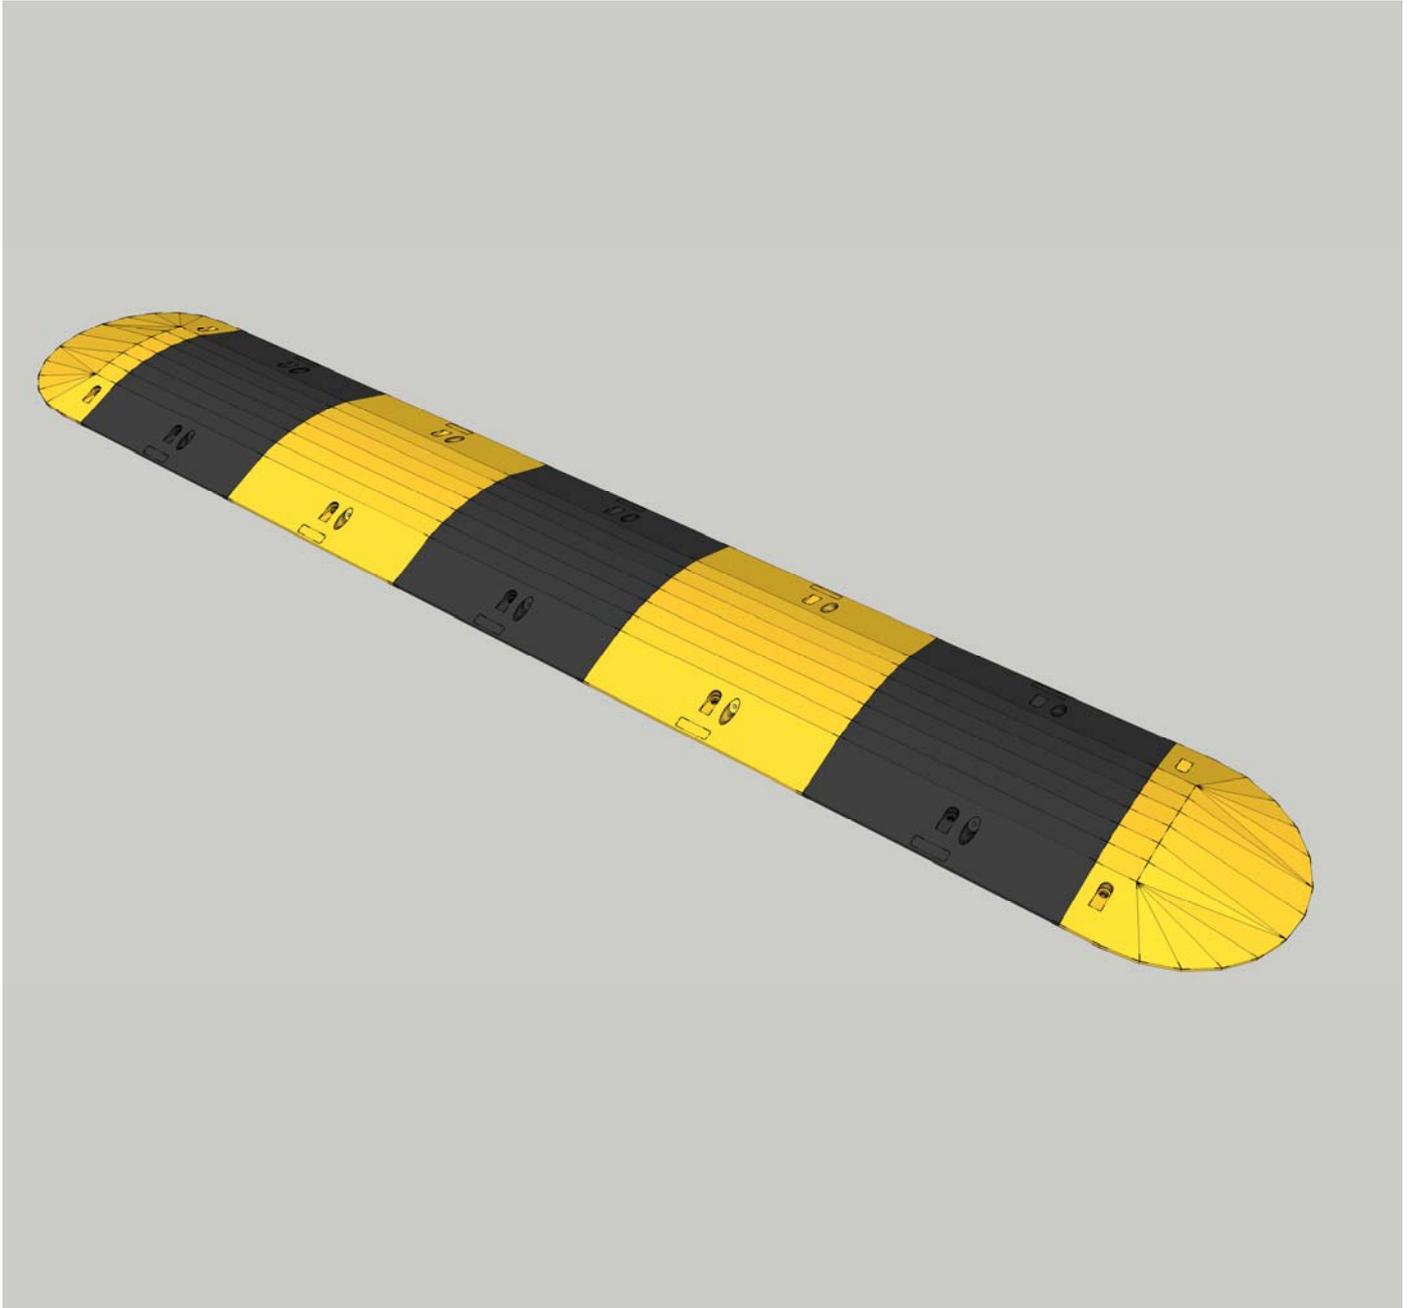

Speed Bump Product Information

Speed Bump Typical Technical Data

Speed Bump section sizes:	Mid section:	Height 50mm, Width 500mm, Depth 350mm
	End section:	Height 50mm, Width 250mm, Depth 350mm

Speed Bump Installation Guide and Tips

Safety

When installing Speed Bumps standard personal protective equipment should be worn as a minimum. These include 3M dust masks (or similar), safety goggles, heavy duty gloves and overalls.

Preparation

Ensure that the areas to have Speed Ramps fitted are clean, dry and free from loose and friable material. Any "dished" or damaged surface areas should be patch repaired to provide a reasonably flat and consistent surface.

Dry fit all Speed Bumps to ensure they fit freely and that they sit flat down on the surface.

The following can be used as a guide when installing the Speed Bumps;

- 1) Position Speed Bumps on substrate surface where they are to be installed.
- 2) Mark out clearly where the Speed Bumps are to be drilled and fitted.
- 3) Drill through the pre-made fixing holes on the Speed Bump into the substrate.
- 4) Screw Speed Bumps down into substrate using the fixings supplied.

Speed Bump Cleaning Guide and Tips

Whilst Speed Bumps are extremely resilient to dirt and contaminants, it can, as with most other things, become dirty.

Dirt and debris can easily be removed using a stiff brush and should be carried out on a regular basis.

If Speed Bumps has been subjected to spillages or the dirt has become embedded, detergents such as Grezoff or similar can be used. It is always advisable to test any cleaning product on Speed Bumps before starting the cleaning procedure. This can be done in an inconspicuous area of the installation or, if preferred, a sample can be sent, free of charge for testing purposes.

Using the detergent, warm water and a suitable brush, scrub the areas until clean. The excess water can be removed using a wet/dry vacuum cleaner or suitable absorbable materials.

Where circumstances allow, Speed Bumps can be power washed without causing harm. Care should be taken when the Speed Bumps have been stuck down and/or edge sealed as very high-pressure power washing or repeated power washing could cause damage to sealants and adhesives.

General Routine Maintenance

The security of the fixings/adhesive should be checked on a regular basis. Circumstances will vary, based upon the volume of foot traffic etc, but, as a guide, monthly inspections would be advisable.